



Low light vision, 1/2"
Color DSP CCD Camera

CT-570GX series

0.003 lx for color, ExView CCD
Field integration complete with memory board

CT-570GX series is extreme low light sensitivity 1/2" color CCD camera provided with "Field Integration" function for hyper CCTV security applications, biological, microscopic, astronomical and more versatile applications. With the high resolution 1/2" ExView CCD sensor, crisp picture could be produced remarkably at minimum 0.003 lx scene illumination (with 256-field integration set on).

Field integration period is selectable by means of rotary switch located on the side panel. Integration duration can readily be selected within the range from 2-field up to 256-field. Integration function can be set either to AUTO mode or MANUAL mode.

Features :

1/2" ExView CCD sensor (SONY)
High resolution 470TV lines
Y/C output provided as standard
Backlight compensation
AGC on/off (30dB)


0.003lux scene illumination(256-field integration)
Easy mode setting by DIP switch
S/N 48dB or more
Digital Signal Processing (DSP)




Rear control panel

TUSS Vision, Inc.

External appearance

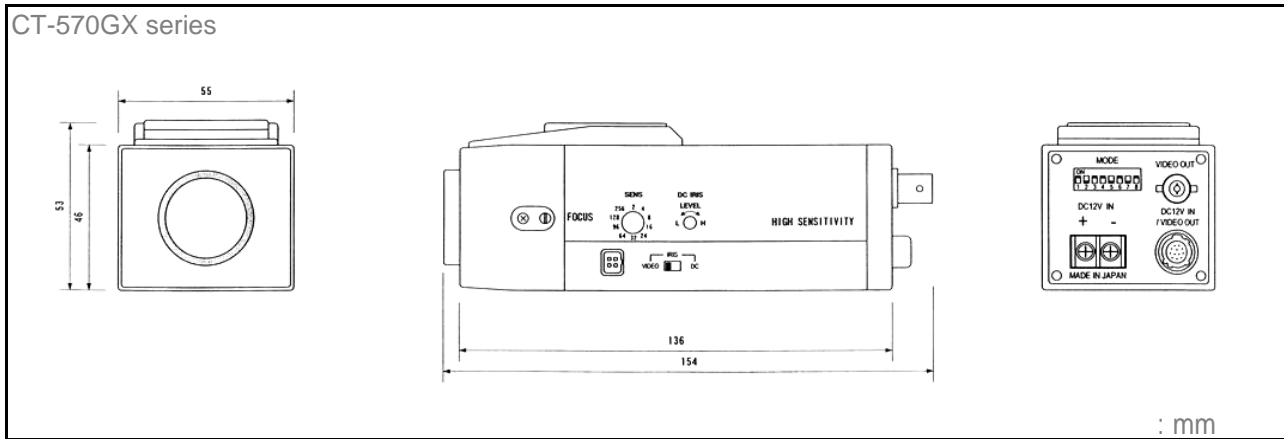

Rear control panel



12P connector

I/O pin assignment

Pin #1	GND	Pin #7	C OUT
Pin #2	+12VDC IN	Pin #8	C GND
Pin #3	VIDEO GND	Pin #9	N.C.
Pin #4	VIDEO OUT	Pin #10	N.C.
Pin #5	Y OUT	Pin #11	+12VDC IN
Pin #6	Y GND	Pin #12	GND

Specifications

	CT-571G	CT-575G
CCD	1/2" ExView CCD, High resolution	
Number of effective elements	768 x 494 (NTSC)	752 x 582 (PAL)
Sync. System	Internal	
Scanning system	2:1 interlace	
Video output	VBS 1.0Vp-p, 75ohms and Y/C output	
Horizontal resolution	470TV lines	
S/N ratio	Greater than 48dB (AGC Off)	
Electric shutter	1/60 (1/50 for PAL) - 1/10,000 sec.	
Gamma	0.45	
AGC	Off / On (High:30dB or Low:20dB selectable)	
Min. scene illumination	0.003 lx F1.2 with AGC ON, with 256-field integration	
Lens mount	CS-Mount or C-mount using the supplied adapter	
Auto iris lens connector	Provided on side panel.	
Power connector	Screw terminal or 12P(Hirose) connector	
Power requirement	+12VDC regulated	
Storage temperature	-30 to +70	
Operating temperature	0 to +45	
Weight	400g approx.	
Dimensions (WxHxL)	55 x 53 x 136mm	

TUSS Vision, Inc.

Product made in Japan